

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/001433

International filing date: 15 April 2005 (15.04.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB
Number: 0408366.3
Filing date: 15 April 2004 (15.04.2004)

Date of receipt at the International Bureau: 21 June 2005 (21.06.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

PCT/GB9005/001433



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

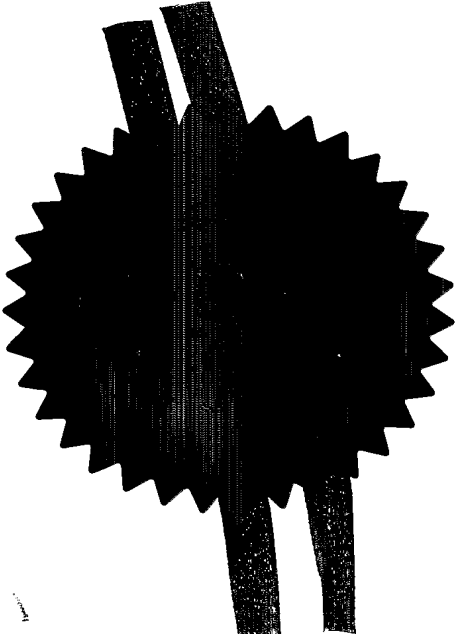


Signed *He Behen*

Dated 26 May 2005



15 APR 2004

The
Patent
Office

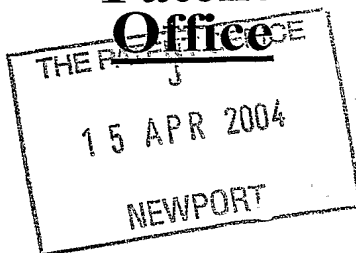

1/77

The Patent Office

Cardiff Road
Newport
South Wales NP10 8QQ

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet, from the Patent Office to help you fill in this form)

1.	Your reference	LPT0626		
2.	Patent application number (The Patent Office will fill in this part)	0408366.3	15APR04 E888684-2 D02806 POL/7700 0.00-0408366.3 CHEQUE	
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	KAB Seating Limited Stone Circle Road Round Spinney Northampton NN3 8RS		
	Patents ADP number (if you know it)	05611744001		
	If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom		
4.	Title of the invention	SEAT SUSPENSION SYSTEM		
5.	Name of your agent (if you have one)	Barker Brettell		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	138 Hagley Road Edgbaston Birmingham B16 9PW		
	Patents ADP number (if you know it)	7442494002 ✓		
6.	Priority: Complete this section if you are declaring priority from one or more earlier patent applications, filed in the last 12 months.	Country	Priority application number (if you know it)	Date of Filing (day/month/year)
7.	Divisionals, etc: Complete this section only if this application is a divisional application or resulted from an entitlement dispute (see note f)	Number of earlier application		Date of filing (day/month/year)
8.	Is a Patents Form 7/77 (Statement of inventorship and of right to grant of a patent) required in support of this request? Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. Otherwise answer NO (See note(d))			
	Yes			

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document
- Continuation sheets of this form -

Description 08 + 08

Claim(s) 04 + 04

Abstract -

Drawing(s) 02 + 02



10. If you are also filing any of the following, state how many against each item.

Priority documents -

Translations of priority documents -

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*) -

Request for preliminary examination 1
(*Patents Form 9/77*)

Request for substantive examination -
(*Patents Form 10/77*)

Any other documents -
(*please specify*)

11. I/We request the grant of a patent on the basis of this application.

Signature

Barker Brettell
Barker Brettell

Date

14.04.2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Ms. Lucy P. Trueman

Tel: 0121 456 1364

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 01645 500505
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SEAT SUSPENSION SYSTEM

The present invention relates to a seat suspension system, particularly for use in vehicles seats, such as driving seats.

5

In vehicles, particularly working vehicles such as trucks, buses, tractors construction and earth moving equipment, fork-lift trucks and industrial vehicles, where drivers spend a large amount of time in the driving seat, and often driving long distances or over uneven ground, the driving seat
10 is provided with a suspension system. The suspension system is designed to isolate low frequency vibrations, which can have adverse effects on the well being of the driver, for example causing back or kidney problems, and which can also affect the driver's control of the vehicle.

15 There are a number of suspension systems in existence and these known systems generally comprise a mechanical portion, which allows the seat to move up and down with motion of the vehicle and an integral spring element, and usually a damper, to isolate vibrations from the vehicle and thus prevent, or reduce the amount of, vibrations reaching the driver.

20

The present invention provides a suspension system for a vehicle seat comprising:

a top portion;

a first part having a base portion, means to receive the top portion and
25 means to allow movement of the base portion and top portion towards and away from each other;

a second part comprising a spring element adapted in use to control movement of the base portion and top portion towards and away from each other; and wherein the top portion and the second part are releasably
30 connected to the first part.

The advantages of the present suspension system are that the manufacturing process is more flexible and the type of spring need not be decided until late in the manufacture process. Replacement of parts suffering from wear can be carried out without needing to discard the complete unit and the customer has more flexibility in the system being able to change the top portion or components of the system as required.

Preferably the top portion is provided with an upper surface and a lower surface and the top portion is adapted to receive a seat base on the upper surface. Preferably the base portion is provided with an upper surface and a lower surface and is adapted to be secured to a vehicle with the lower surface contacting the vehicle.

The means to allow the base portion and the top portion to move towards and away from each may be any suitable means.

For example, the top portion and the base portion may be secured to each other by the provision of at least one pair, preferably two pairs, of pivotally connected arms. A first arm in each pair preferably has one end pivotally secured to the base portion and a second arm in each pair preferably has one end releasably pivotally secured to the top portion. The free end of each second arm is provided with means, such as a roller, slides or a swinging link, to allow it to move relative to a surface, preferably the upper surface, of the base portion. The free end of each first arm is provided with means, such as a roller, slides or a swinging link, to allow it to move relative to a surface, preferably a lower surface of the top portion. This arrangement allows movement of the top portion and base portion towards and away from each other.

In a first embodiment the spring element may be an air spring. The air spring may be positioned between the base portion and one of the first

and second arms to control movement of the arms relative to the base portion. Alternatively the air spring may be positioned between the first and second arms of the at least one pair of arms to control movement of the arms relative to each other. The air spring may be positioned on a, or
5 between two, suitable mountings positioned between the first arms or the second arms of a pair of arms.

In a second embodiment the spring element may comprise one or more mechanical tension springs. The or each mechanical tension spring
10 preferably has a first and a second end wherein the first end is adapted to act on the free end of the first arm. The second end of the or each mechanical tension spring is secured to the top portion.

In both embodiments the tension in the spring element can be adjusted by
15 any suitable means to allow for different drivers.

In both embodiments the top portion is releasably connected to the first part. The top part may be releasably connected to the first part by any suitable means. The top portion is preferably generally rectangular
20 having a pair of opposing short sides and a pair of opposing long sides.

Most preferably the top portion is provided with one portion adapted to be releasably secured to each second arm of the first part. The or each portion adapted to be releasably secured to each second arm is preferably
25 positioned on a long side of the top portion close to the point where the long side meets one of the short sides. Where there are two portions provided they are preferably positioned on opposing long sides close to where the long sides meet the same short side.

30 The or each portion adapted to be releasably secured to each second arm is preferably a wing extending from the opposing long side. The or each

wing is preferably provided with an aperture therethrough to receive a pivot bolt. A corresponding aperture is provided through the or each second arm of the first part. A pivot bolt is provided of a suitable size to pass through the aperture in each wing and in each second arm.

5

The top portion is further provided with means to receive the free end of the or each first arm of the first part. Preferably the means to receive the free end of the or each first arm is positioned close to the opposite short side distal from the or each portion adapted to be releasably secured to the second arm. The means to receive the free end of the or each first arm preferably comprises one or more channels in which the free end of the or each first arm is received. The or each channel is suitably sized to allow movement of the free end of the or each first arm over the lower surface of the top portion within the or each channel as the top part and base part move towards and away from each other.

10
15

In use the top portion is first positioned such that the free end of the or each first arm is received in the or each channel and then the second arm is secured to the top plate by means of the pivot bolt passing through the or each portion of the top plate and the or each second arm.

20

In the first embodiment, where an air spring is provided, the top part is preferably provided with means to receive one portion of an air spring, preferably mounted on the lower surface of the top part. Alternatively the base part may be provided with means to receive one portion of an air spring, preferably mounted on the upper surface of the base part.

25

In this embodiment there is preferably provided a means to receive a second portion of an air spring, which is releasably secured to the first or second arm or between the first arms or the second arms, preferably by

30

use of a nut and bolt passing through the means to receive a second portion of an air spring and the first or second arms.

In the second embodiment, where at least one mechanical tension spring is provided, the or each spring has one end secured to the top portion by an appropriate means such as a hooked portion received by a corresponding bar mounted on the top portion. A second end of the or each spring is releasably secured to or between the free ends of the first arms. Where there are a pair of first and second arms a bar may be provided between the free ends of the pair of first arms. Preferably the second end of the or each spring is provided with a hooked portion adapted in use to be received by the bar extending between the free ends of the first arms. The bar may be movable along the free end of the first arm to adjust the tension in the spring. Alternatively the second end of the or each spring may be received by an aperture provided in the free end of each first arm.

In a third embodiment the means to receive the top part and to allow the base portion and the top portion to move towards and away from each other may comprise one or more bars designed to extend from the base portion and receive the top portion and being pivotally secured directly between the top portion and the base portion, or by pivotal linkages. A spring element may be placed between the top portion and base portion; the spring element may be an air spring, a compression spring or a tension spring.

An embodiment of the present invention will now be described with reference to the accompanying drawings in which:

Figure 1 shows a perspective view of a first part of a device of the present invention;

Figure 2 shows a perspective view of a top portion according to a first embodiment of the present invention; and

5 Figure 3 shows a perspective view of a top portion according to a second embodiment of the present invention.

Figure 1 shows a first part 1 of a seat suspension system. The first part comprises a base portion 2, which is generally rectangular in shape having a pair of opposing long sides 2a, 2b and a pair of opposing short
10 sides 2c, 2d.

Two pairs of arms are provided with each pair comprising a first arm 3 and a second arm 4 pivotally secured together at their mid points to form a generally "X" shape.
15

The first arm 3 of each pair has a first end 3a pivotally secured to the base portion 2 at the corners where the long sides 2a, 2b meet the short side 2d.

20 The free ends 3b of the first arms 3 have an elongate bar 5 passing between them. Each end of the bar 5 is provided with a roller 6a, 6b.

Each second arm 4 has a free end 4a provided with a roller 7a (not shown), 7b that contacts and is movable over the base portion 2. The
25 other ends 4b of the second arms are provided with an elongate hollow tube 8 and a bar 20 extending between them.

The first part 1 can be moved about the pivot joining the first and second arms of each pair by movement of the rollers 7a, 7b provided on the free
30 ends of the second arms 4a, 4b over the base portion 2.

Figure 2 shows a first embodiment of a top portion 9 of the present invention for releasable attachment to the first part 1 described above. The top portion 9 is generally rectangular in shape having a pair of opposing long sides 9a, 9b and a pair of opposing short sides 9c, 9d. A set of four tension springs 10 is provided extending substantially from one short side 9c to the other 9d. The springs 10 are secured substantially at short side 9c by the provision of a bar (not shown) extending between the two long sides close to short side 9c over which hooked portions of the springs are attached (not shown). This bar may be movable to adjust the tension in the set of springs 10 when in use.

The other ends of the springs 10 are provided with hooked portions which are adapted in use to be secured over the bar 20 extending between the pivotally secured ends 4b of the second arms 4 when the top portion is attached to the first part.

The top portion 9 has two wings 11a, 11b depending from the long sides 9a, 9b positioned close to the short side 9d. Each wing has an aperture therethrough.

The top portion 9 has a return nose portion 12 depending from the opposite short side 9c sized to receive the free ends 3b of first arms 3 of the first part 1 and to allow movement of the rollers 6a, 6b within the return nose portion.

In use the return nose portion 12 is positioned over and receiving the free end portions 3b of the first arms 3. The springs 10 are secured over bar 20 of part 1, this may be done by moving the movable bar towards the end 9d of the top portion 9 and then tension can be applied to the springs by moving the movable bar towards the end 9c once the springs are in position over the bar 20 and the top portion is in place. The top portion 9

is then releasably secured to the first part 1 by passing a pivot bolt 13 through the apertures in the wings 11a, 11b and the hollow tube 8.

5 The tension in the set of springs 10 controls movement of the top portion 9 towards and away from the base portion 2 and isolates vibrations from the vehicle to the seat carried by the suspension system. One or more dampers and sets of bearings, not shown, are also included as and where necessary.

10 Figure 3 shows a top portion according to a second embodiment wherein like numbers indicate like parts. The top portion 9 of the second embodiment is not provided with a set of springs 10 but instead has an air spring 14 received by a first mounting portion, not shown, depending from the lower surface of the top portion 9 and sized to receive a portion
15 of an air spring 14. The air spring 14 is secured to the top portion 9 by means of a screw 21 received by an aperture 22 in the top portion 9. A second mounting portion 15 is provided to be releasably secured between the second arms 4 by means of nuts and bolts passing through the mounting portion 15 and apertures 16 provided in the arms 4.

20

In use the second mounting portion 15 is secured in place between the second arms 4 and air spring 14 is placed on the second mounting 15 such that when the top portion is secured to the first part 1, as described in relation to figure 2, the air spring is positioned between the first
25 mounting and the second mounting 15 and acts between the top portion 1 and the arms 4 to control movement of the top portion 1 towards and away from the base portion 2 and to isolate vibrations. The air spring 14 is secured in position by means of screw 21.

CLAIMS

1. A suspension system for a vehicle seat comprising:
a top portion;
5 a first part having a base portion, means to receive the top portion and means to allow movement of the base portion and top portion towards and away from each other;
a second part comprising a spring element adapted in use to control movement of the base portion and top portion towards and away from
10 each other; and wherein the top portion and the second part are releasably connected to the first part.
2. A system according to Claim 1 wherein the top portion is provided with an upper surface and a lower surface.
- 15 3. A system according to Claim 1 or Claim 2 wherein the base portion is provided with an upper surface and a lower surface.
4. A system according to any preceding claim wherein the top portion
20 and the base portion are secured to each other by the provision of at least one pair of pivotally connected arms.
5. A system according to Claim 4 wherein:
25 a first arm in each pair has one end pivotally secured to the base portion and a second arm in each pair has one end releasably pivotally secured to the top portion;
the free end of each second arm is provided with means to allow it to move relative to an upper surface of the base portion; and
30 the free end of each first arm is provided with means to allow it to move relative to a lower surface of the top portion.

6. A system according to any preceding claim wherein the spring element is an air spring.
7. A system according to Claim 6, when dependent on Claim 5, wherein
5 the air spring is positioned between the base portion and one of the first and second arms to control movement of the arms relative to the base portion.
8. A system according to Claim 6 wherein the air spring is positioned
10 between the first and second arms of the at least one pair of arms to control movement of the arms relative to each other.
9. A system according to Claim 7 or 8 wherein the air spring is positioned on a, or between two, suitable mountings positioned between
15 the first arms or the second arms of a pair of arms.
10. A system according to any of Claims 1 to 5 wherein the spring element comprises one or more mechanical tension springs.
11. A system according to Claim 10, when dependent on Claim 5,
20 wherein the or each mechanical tension spring has a first and a second end and wherein the first end is adapted to act on the free end of the first arm and the second end of the or each mechanical tension spring is secured to the top portion.
12. A system according to any preceding claim wherein the top portion is generally rectangular having a pair of opposing short sides and a pair of opposing long sides and the top portion is provided with one portion adapted to be releasably secured to each second arm of the first part.
- 25
30

13. A system according to Claim 12 wherein the or each portion adapted to be releasably secured to each second arm is preferably a wing extending from the opposing long sides and the or each wing is provided with an aperture therethrough.

5

14. A system according to Claim 13 wherein a corresponding aperture is provided through the or each second arm of the first part.

15. A system according to Claim 14 wherein a pivot bolt is provided of a suitable size to pass through the aperture in each wing and in each second arm.

10

16. A system according to any preceding claim wherein the means to receive the free end of the or each first arm comprises one or more channels in which the free end of the or each first arm is received and the or each channel is suitably sized to allow movement of the free end of the or each first arm over a lower surface of the top portion within the or each channel as the top part and base part move towards and away from each other.

20

17. A system according to Claim 1 wherein the means to receive the top part and to allow the base portion and the top portion to move towards and away from each other comprise one or more bars designed to extend from the base portion and receive the top portion and being pivotally secured directly between the top portion and the base portion, or by pivotal linkages.

25

18. A system according to Claim 17 wherein a spring element is positioned to act in use between the top portion and base portion.

30

19. A suspension system substantially as described herein and with reference to the drawings.

Fig 2


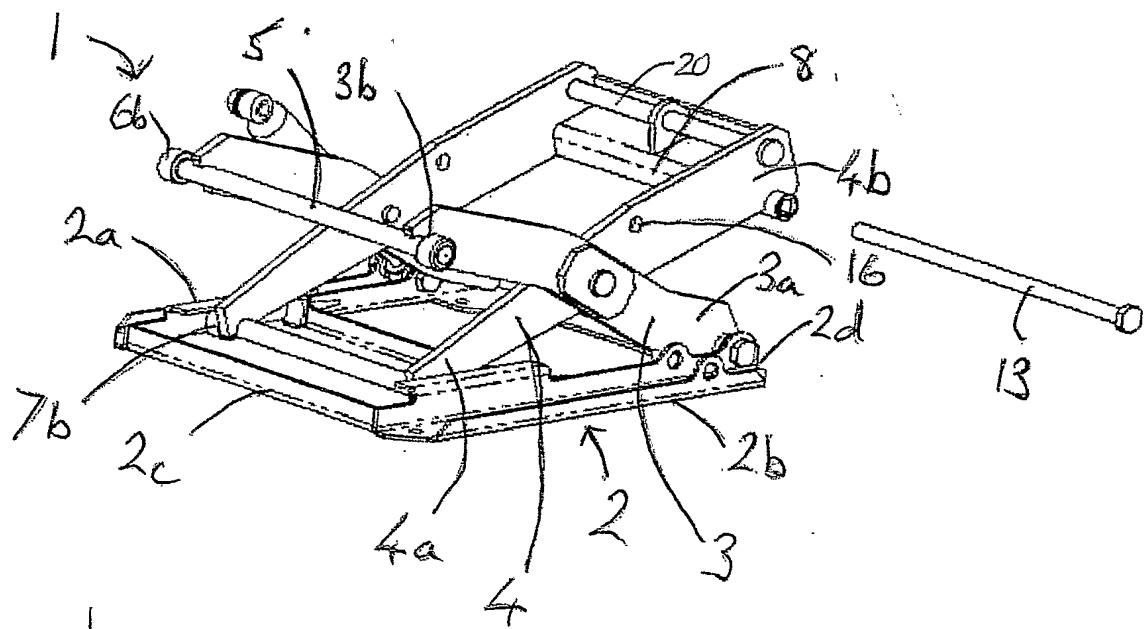


Fig 1



2/2

Fig 3

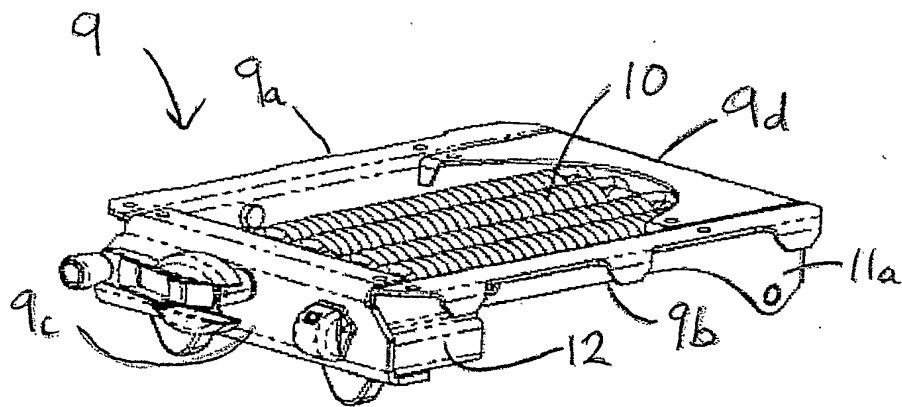